



Zing Floor Prep

How to Restore a Floor Without Stripping



Low Speed Side to Side Method

Use Zing Floor Prep @ 8 oz. per gallon cold water to restore your floor without stripping.

Restore using low speed side to side machine equipped with standard black strip pads, medium grade hair pad or **Blue Blend Burnish Pad** by Americo.

It's a great idea to know how many coats of finish is on the floor you're going to restore. Follow [Zing Floor Care Technique #6 "Razor Blade Test"](#) to see how many coats you have. [See many Floor Care Techniques @ zingfloorcare.com](#)

Zing International, Inc. • 6501 Congress Ave. #100 • Boca Raton, FL 33487

P.O. Box 480304 • Delray Beach, FL 33448

P: (800) 233-4485 • Email: mike@zingfloorcare.com

No. 980



Floor looks dead. We will bring it back to life without stripping!

Before Prepping - This is an all-purpose room at a church. Surface is dirty and finish has heavy scratches. Adding more floor finish will fill in the scratches and give the floor more protection and shine. *(Shine above indicates finish is present)*



Prepping - Standard Low Speed Side to Side Floor Machine equipped with **Standard Black Strip Pad**. We used 8 ounces **Zing Floor Prep** per gallon cold water to do the job.

If you want to use an automatic scrubber I would do so only for laying down chemical and for picking up dirty solution. Scrubber may not be effective enough for actual process. If you can add weights to your low speed machine I would do that so machine, pad and chemical get down deep.



Before Dust Mopping - Treat dust mop with **Zing Dust Control**. **Dust Control** should be used daily, **Dust Control** not only holds the dust and dirt to the mop it flocculates the dirt so that it sticks together. You will actually pick up more dust and dirt by using **Zing Dust Control**.




Dust Mop or Vacuum - to pick up loose dirt, dust and debris. Use a scraper to remove anything stuck to the floor.



Apply solution - Apply **Zing Floor Prep** to the floor keeping the floor wet. You want to be able to let the solution sit 2-3 minutes before running the floor machine over it so you don't want the solution to dry on the floor. Watch as the dirt starts going into the solution.



Run floor machine in both directions and remember to keep the floor wet. If the solution dries the dirt dries back into the finish. If that happens apply more solution to re-emulsify.

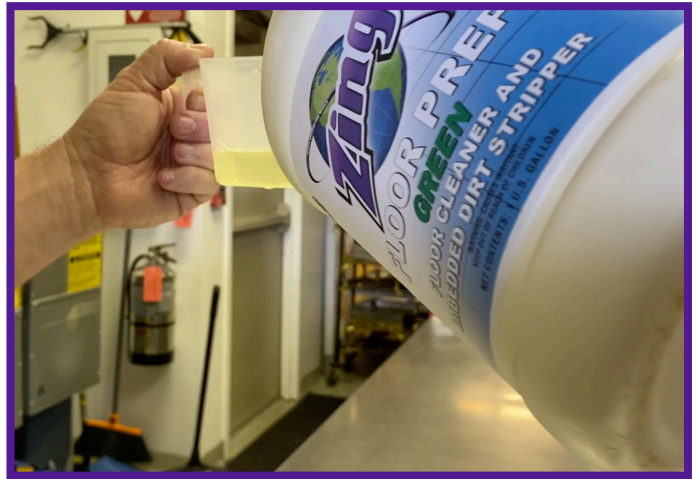

Rinse the floor utilizing **Zing Floor Prep** diluted 1 oz. per gallon cold water. You will notice the floor is clean and still has shine, Shine means we did not remove the finish that was already present on the floor.



Burnish the floor with a high speed burnisher equipped with **Medium Grade Hair Pad** or **Blue Blend Burnish Pad by Americo**. Burnishing helps tighten the finish that is on the floor making adding more coats smooth and easy.



Dust Mop before applying finish to remove any dust or dirt kicked up when burnishing.



Apply Finish using **Floor Finish Dispensing Valve** that attaches to a gallon container.





Zing First Impression Coating with Dispensing Valve.



Most people use Microfiber Flat Mops today, they are great at putting on nice smooth, even coats.



First Coat - This photo shows the first coat of **Zing First Impression Floor Coating**. Be sure each coat is dry before adding another coat. To be sure finish is dry follow **Zing Floor Care Technique #1- “When is newly applied floor finish dry and ready for traffic or re-coating?”** You can see this technique and many others @ **zingfloorcare.com**



Second Coat Zing First Impression Coating



Third Coat Zing First Impression Coating



Fourth Coat Zing First Impression Coating



Maintain floor with microfiber flat mop or automatic scrubber and **Zing KLEEN-UP** diluted 1 oz. per gallon cold water.

If you clean regularly with Zing KLEEN-UP your should not have to strip or even restore your floors!



Zing KLEEN-UP